

AMS·AMT series

High speed

High Voltage Amplifier



AMS·AMT series is a rack mountable type, fast response high voltage operational amplifier. It gives quick response as fast as 100kHz and provides high voltage outputs in reference to its input wave forms such as Sine, Triangle, Saw Tooth, Square Wave Forms and more.

13 different models are available as a standard unit. They are all solid state. Output voltage ranges from $\pm 600V$ to $\pm 20kV$.

FEATURES

- Output $\pm 600V$ to $\pm 20kV$
- High speed response $360V/\mu\text{sec}$ (AMT)
- Various types of output wave forms according to the input wave
- DC bias function
- DC output voltage monitor (3½ digit meter)

APPLICATIONS

- Beam deflection
- Corona discharge
- Electrostatic chuck
- Electrophotography process
- Breakdown voltage testing
- Electroviscosity fluid
- Lighting discharge tube
- Various electrostatic testing

LINEUP

< AMS series : High Speed model >

Output voltage (Vdc)	Output current (mA)	MODEL	Slew Rate (full scale)	Frequency Response(-3dB)*	
				full scale	10% of full scale
-600 to +600	50	AMS-0.6B50	30V/ μs	DC to 15kHz	DC to 30kHz
-1k to +1k	30	AMS-1B30		DC to 10kHz	DC to 20kHz
-1.5k to +1.5k	20	AMS-1.5B20		DC to 6kHz	DC to 12kHz
-3k to +3k	10	AMS-3B10		DC to 3kHz	DC to 6kHz
-5k to +5k	6	AMS-5B6		DC to 2kHz	DC to 4kHz
-10k to +10k	2	AMS-10B2		DC to 1kHz	DC to 2kHz

< AMT series : Ultra High Speed · High Power model >

Output voltage (Vdc)	Output current (mA)	MODEL	Slew Rate (full scale)	Frequency Response(-3dB)*	
				full scale	10% of full scale
-600 to +600	100	AMT-0.6B100	250V/ μs	DC to 100kHz	DC to 100kHz
-1k to +1k	60	AMT-1B60		DC to 60kHz	DC to 100kHz
-1.5k to +1.5k	40	AMT-1.5B40		DC to 40kHz	DC to 80kHz
-3k to +3k	20	AMT-3B20	360V/ μs	DC to 30kHz	DC to 60kHz
-5k to +5k	20	AMT-5B20		DC to 20kHz	DC to 40kHz
-10k to +10k	10	AMT-10B10		DC to 10kHz	DC to 20kHz
-20k to +20k	10	AMT-20B10		DC to 5kHz	DC to 10kHz

* Typical value at sine wave.

SPECIFICATIONS

Input voltage	115VAC $\pm 10\%$ 50/60Hz single phase
Output control	External voltage control Vcon-in -10V to +10V *1 (input impedance : $\geq 10k\Omega$)
DC Bias	Front panel 10-turn potentiometer enables setting between -100% and +100%
Regulation	Line $\pm 0.05\%$ ($\pm 10\%$ line change) Load 0.05% (10 to 100% load change) *2
Ripple	AMS: $\leq 0.1\%$ p-p *2 AMT: $\leq 0.02\% + 1Vp-p$ *2
Stability	0.016%/Hr typ. *2
Digital Panel Meter	3½-digit display *3
Voltage Monitor	-10V to +10V from BNC connector on front panel. (output impedance 1k Ω)
Remote ON/OFF	Enable to output ON/OFF by external contact signal (short:ON, open:OFF)

Protection	Protection against over current by cutting of HV output. Output short circuit and over voltage. Arc protection and blackout protection.
Operating Temp.	0°C to +40°C
Storage Temp.	-20°C to +60°C
Humidity	20 to 80%RH(no condensation)
Accessories	Input AC cable 2.5meters (1) Output HV cable flying lead 1.5m (1) Instruction Manual (1)


*1 Offset voltage : within 0.5% of rated output at Vcon-in = 0V

*2 Value at DC output with resistive load maximum rating


*3 DC output : DC voltage
More than 10Hz output : Average voltage

DIMENSIONS inch(mm)

AMS · AMT series

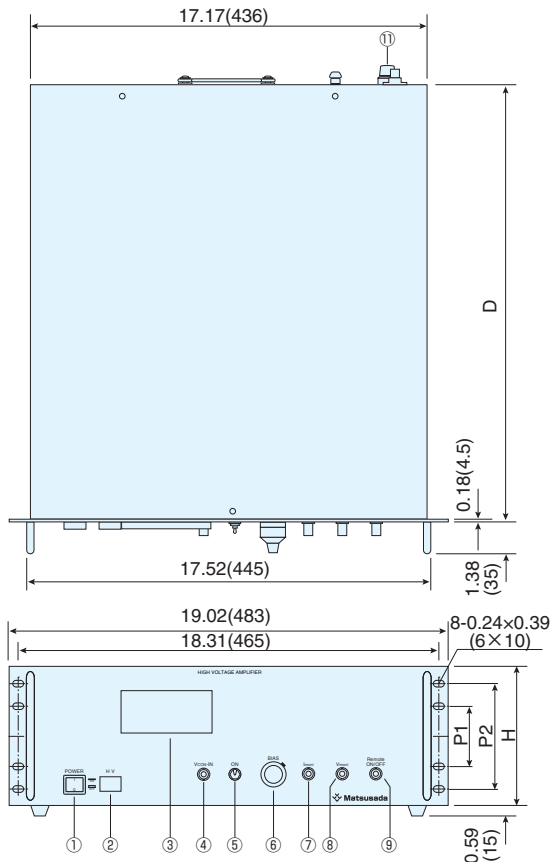

AMT-20B10

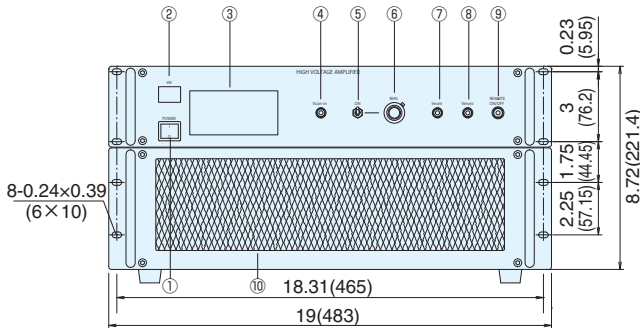

Model	H	P1 (EIA)	P2 (JIS)	D	Weight (kg)
AMS : all models	5.23(133)	2.25(57.2)	3.94(100)	19(484)	14 to 18
AMT : 600V to 10kV	7(177)	4(101.6)	5.91(150)	19(484)	14 to 23
AMT-20B10	See the figure			24(611)	27

- ① **POWER ON/OFF switch:** Have priority to all other operations for safety reason.
- ② **HV ON/OFF switch:** To be also used to reset output cutoff status due to output over load, output short circuit protection or black out protection. Remote switch operation is possible only when output switch is on.
- ③ **OUTPUT voltage meter**
- ④ **External control voltage (Vcon-in)input connector:** BNC receptacle
- ⑤ **Bias ON/OFF switch**
- ⑥ **Bias setting dial :** 10-turn potentiometer
- ⑦ **OUTPUT current monitor terminal(option)** BNC receptacle
- ⑧ **OUTPUT voltage monitor terminal** BNC receptacle
- ⑨ **Remote ON/OFF terminal** BNC receptacle
- ⑩ **Air Intake** (only AMT-20B10)
- ⑪ **FUSE**
- ⑫ **OUTPUT connector**
- ⑬ **Ground terminal** M6
- ⑭ **AC inlet**

* Design of rear panel can be slightly different from model to model. Please contact our sales office if details are required.

OPTIONS

-LC	CURRENT LIMIT Limits the output current at time of overload
-LN	Cancellation of blackout protection
-L1	Output current monitor -10V to +10V from BNC connector on front panel(output impedance 1kΩ up to 2kHz bandwidth)
-L(230V)	Input Voltage AC230V ±10% single phase

*When ordering, please suffix L Mark(option mark) to the model number.
{e.g.} AMS-1B30-LC, AMS-1B30-LC1(230V)
For combined options, please arrange option marks in an alphabetical order.

INPUT / OUTPUT CABLE

Input cable

Input : 115V models Input : 230V models
➔ CABLE TYPE1 ➔ CABLE TYPE3

Length is 2.5m for both.(see CABLE series catalog for details)

Output cable

CN-40-AHVP Output HV cable 1.5m length

Length is 1.5m only.

In case different length is required, contact to nearby sales office.

Warranty

We warrant that products contained in this catalog (hereinafter, the "Products") are free from defects in material and workmanship under normal use for a period of one (1) year from the date of shipment thereof. However, the warranty period for X-ray detectors and X-ray source shall be either one (1) year from the date of shipment or 1,000 hours, whichever shorter. The above warranty shall not apply to any Product which, at our sole judgment, has been: i) Repaired or altered by persons unauthorized by us; or ii) Connected, installed, adjusted or used otherwise than in accordance with the instructions furnished by us (including being used in an inappropriate installation environment, such as in corrosive gas, high temperature and humidity). We are not liable for any loss, damage or failure of the Products after the shipment thereof caused by external factors such as disasters. If any Product is shown to be defective as satisfactory to us, we, at our sole discretion, repair or replace such defective Products at no cost to the purchaser. We assume no liability to the purchaser or any third party for special, incidental, consequential, or other damages resulting from a breach of the foregoing warranty. This warranty excludes any and all other warranties not set forth herein, express or implied, including without limitation the implied warranties of merchantability or fitness for a particular purpose. The Products are not designed and produced for such applications as requiring extremely high reliability and safety, or involving human lives (such as nuclear power, aerospace, social infrastructure facility, medical equipment, etc.). The use under such environment is not covered by this warranty and may require additional design and manufacturing processes.



Matsusada Precision Inc.

For products

www.matsusada.com/product

For contact

www.matsusada.com/contact

San Jose Office : 2570 N. First Street Suite 200 San Jose, CA 95131
Tel: +1-408-273-4573 Fax: +1-408-273-4673

Dallas Office : 5430 LBJ Freeway, Suite 1200 Dallas, TX 75240
Tel: +1-972-663-9336 Fax: +1-972-663-9337

International Office : Osaka-City, Osaka Japan
Tel: +81-6-6150-5088 Fax: +81-6-6150-5089

New York Office : 80 Orville Drive Suite 100 Bohemia, NY 11716
Tel: +1-631-244-1407 Fax: +1-631-244-1496

Headquarters : 745 Aoji-cho Kusatsu Shiga 525-0041 Japan
Tel: +81-77-561-2111 Fax: +81-77-561-2113